

1423 Main St. A/C System Install *date / time*



Jim T. Technician

Date of Service:

6/12/2022

Time of Service:

10:00 AM

Sample Report

Mick Richardson
264 Harding Court
Loveland, CO 80538

Date of Service: 8/9/2022
Time of Service: 10:49:14 PM

What Are Your System Vitals?


Just like your health vitals, temperature, pulse, blood pressure etc, your A/C system vitals show the overall health of your air conditioning system. These vitals account for both the refrigerant and air delivery side of the system. System targets that are out of range are typically related to a system diagnostic listed below. Correcting the diagnostic faults, if possible, should put the system vitals back in the normal range.

YOUR SYSTEM SCORE


86% B

Refrigerant Charge

In Range  Out of Range 

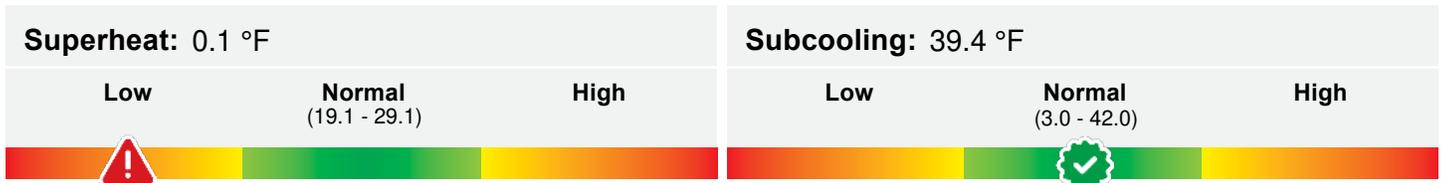

Heat Transfer

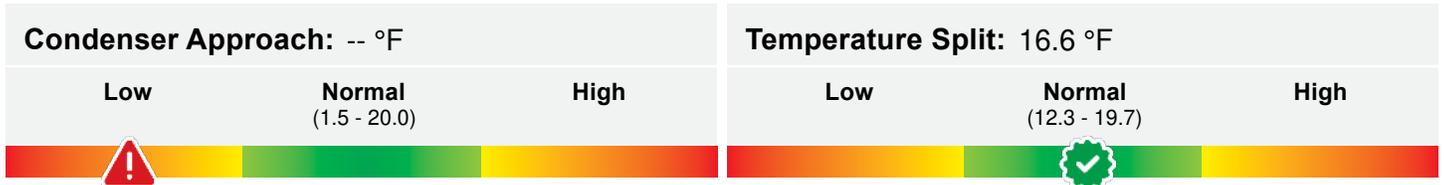

Air Distribution & Filtration



Subsystem Review | **System Diagnostics**

Not yet reviewed

- Liquid line is below outdoor air temperature 14 
- System may be overcharged w/ refrigerant 4 
- Dirty condenser or non-condensibles 3 

Age & Efficiency Losses

The system age scoring is based upon the initial system SEER, capacity, installation date and climate zone. Larger higher capacity systems in hot climates have been shown to age at a faster rate.

-6

Temperature Split Losses

Split losses are directly tied to sensible capacity. Systems with a low temperature split may have a refrigerant charge issue, or more common, a return duct leak that could result in excessive run times and substantial energy losses.

0

Static Pressure Losses

High system static pressure can result in high fan watt draw (electrical usage) and/or low airflow as well as premature blower motor failure, especially with ECM/Constant Torque motors. The system can have high total static, supply static, return static or a combination of all three. High static can also exacerbate return air duct leakage and contribute to poor indoor air quality.

0

Approach Losses

A system with high approach has heat rejection issues. This can be the result of a dirty condenser, non condensibles, condenser clearances, and/or condenser air recirculation. Systems with a high approach may also have a low temperature split due to heat returning to the metering device through the liquid line.

0

Refrigerant Charge Losses

Refrigerant charge losses can be the result of a refrigerant undercharge, overcharge and/or non-condensibles. measureQuick considers the deviation in charge from superheat/subcooling targets as well as the metering device type. Fixed/piston metering devices will result in high capacity losses when the system is undercharged.

-8

Your System Score

Using data from several studies that correlate system faults, and system degradation due to age, measureQuick uses a proprietary scoring system to grade the system based upon age and system fault intensity. New systems when properly installed should easily score 95-100%.

86% B



Test In Measurement Details

Jane Smith
1423 Main St
Your City, OH 54321

Date of Service: 6/12/2022
Time of Service: 10:36:22 AM

What Are Your System Vitals?
Just like your health vitals, temperature, pulse, blood pressure etc, your A/C system vitals show the overall health of your air conditioning system. These vitals account for both the refrigerant and air delivery side of the system. System targets that are out of range are typically related to a system diagnostic listed below. Correcting the diagnostic faults, if possible, should put the system vitals back in the normal range.

YOUR SYSTEM SCORE

85% B

Outdoor Measurements

Low Pressure (PSIG)	118.0	
High Pressure (PSIG)	390.0	
Suction Line Temp (F)	50.0	
Liquid Line Temp (F)	91.0	
Discharge Line Temp (F)	170.0	
Outdoor Air Temp (F)	85.0	
Superheat (F)	10.3	
Subcooling (F)	23.8	
Compression Ratio	3.0	
Cond. Volts	231.2	
Cond. Amps	8.5	
Cond. Power Factor	0.95	
Cond. Power (W)	1792	

Indoor Measurements

Return Temp (F)	75.0	
Return %RH (%)	50.0	
Return Wet Bulb (F)	62.6	
Supply Temp (F)	58.0	
Supply %RH (%)	81.0	
Supply Wet Bulb (F)	54.6	
Est. Airflow (SCFM)	1371	
TESP (inH2O)	0.50	
AHU Volts	110.0	
AHU Amps	4.0	
AHU Power Factor	0.95	
AHU Power (W)	897	

System Info & Weather

System Type	Split	
Nominal Tonnage (Tons)	3	
Refrigerant	R410A	
Rated Airflow	400	
SEER	13-16	
Metering Device	TXV	
Atmos. Pressure (psia)	14.696	
Elevation (ft)	5012	
Benchmarked	No	
System Stability	Stable	

Performance Calculations

Nominal Capacity (Tons/Btuh)	3.0 / 36,000
Normalized Capacity (Tons/Btuh)	2.7 / 32,676
Actual Capacity (Tons/Btuh)	2.6 / 31,434 (96% Normalized)
Sensible Capacity (Tons/Btuh)	2.1 / 25,271 (114% Normalized)
Latent Capacity (Tons/Btuh)	0.5 / 6,163 (58% Normalized)
Sensible Heat Ratio	0.8
Temp Split Target (F)	17.1
Temp Split (F)	17.0
Dehumidification (lb/hr)	5.7
Fan Efficacy (W/SCFM)	0.7
Total Power (W)	2689
EER	11.7
Approx. SEER	13.0





Test Out A/C Vitals

Jane Smith
264 Harding Court
Loveland, CO 80538

Date of Service: 6/12/2022
Time of Service: 11:09:08 PM

What Are Your System Vitals?


Just like your health vitals, temperature, pulse, blood pressure etc, your A/C system vitals show the overall health of your air conditioning system. These vitals account for both the refrigerant and air delivery side of the system. System targets that are out of range are typically related to a system diagnostic listed below. Correcting the diagnostic faults, if possible, should put the system vitals back in the normal range.

YOUR SYSTEM SCORE


94% A

Refrigerant Charge


In Range Out of Range

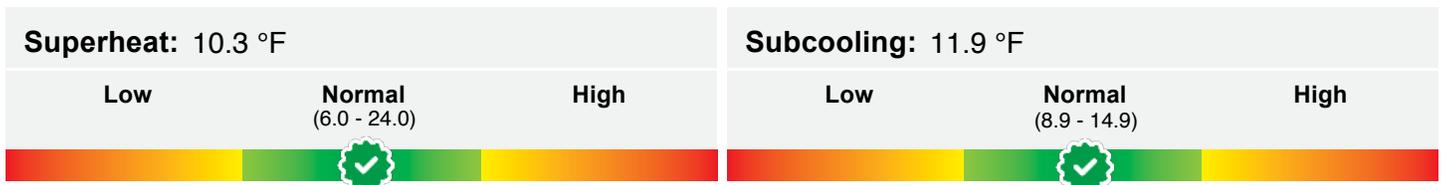

Heat Transfer

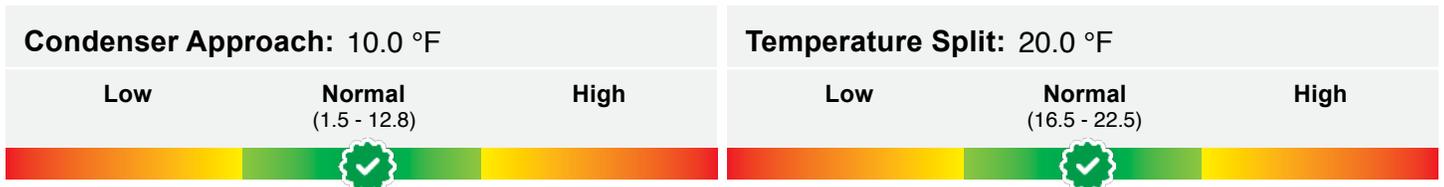

Air Distribution & Filtration

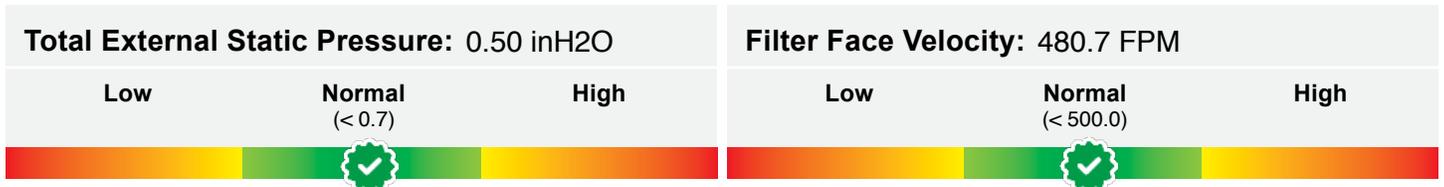

Subsystem Review	System Diagnostics
-------------------------	---------------------------

Not yet reviewed

No system-wide issues were detected.

Sample Report

Note: The Vitals Score and report can be generated as soon as the system is stable or after 10min.



Score Breakdown

Age & Efficiency Losses

The system age scoring is based upon the initial system SEER, capacity, installation date and climate zone. Larger higher capacity systems in hot climates have been shown to age at a faster rate.

-6

Temperature Split Losses

Split losses are directly tied to sensible capacity. Systems with a low temperature split may have a refrigerant charge issue, or more common, a return duct leak that could result in excessive run times and substantial energy losses.

0

Static Pressure Losses

High system static pressure can result in high fan watt draw (electrical usage) and/or low airflow as well as premature blower motor failure, especially with ECM/Constant Torque motors. The system can have high total static, supply static, return static or a combination of all three. High static can also exacerbate return air duct leakage and contribute to poor indoor air quality.

0

Approach Losses

A system with high approach has heat rejection issues. This can be the result of a dirty condenser, non condensibles, condenser clearances, and/or condenser air recirculation. Systems with a high approach may also have a low temperature split due to heat returning to the metering device through the liquid line.

0

Refrigerant Charge Losses

Refrigerant charge losses can be the result of a refrigerant undercharge, overcharge and/or non-condensibles. measureQuick considers the deviation in charge from superheat/subcooling targets as well as the metering device type. Fixed/piston metering devices will result in high capacity losses when the system is undercharged.

0

Your System Score

Using data from several studies that correlate system faults, and system degradation due to age, measureQuick uses a proprietary scoring system to grade the system based upon age and system fault intensity. New systems when properly installed should easily score 95-100%.

94% A



Test Out Measurement Details

Jane Smith
1423 Main St
Your City, OH 54321

Date of Service: 6/12/2022
Time of Service: 11:17:56 AM

What Are Your System Vitals?
Just like your health vitals, temperature, pulse, blood pressure etc, your A/C system vitals show the overall health of your air conditioning system. These vitals account for both the refrigerant and air delivery side of the system. System targets that are out of range are typically related to a system diagnostic listed below. Correcting the diagnostic faults, if possible, should put the system vitals back in the normal range.

YOUR SYSTEM SCORE
93% A-

Outdoor Measurements

Low Pressure (PSIG)	118.0	
High Pressure (PSIG)	350.0	
Suction Line Temp (F)	50.0	
Liquid Line Temp (F)	95.0	
Discharge Line Temp (F)	170.0	
Outdoor Air Temp (F)	85.0	
Superheat (F)	10.3	
Subcooling (F)	11.9	
Compression Ratio	2.7	
Cond. Volts	230.2	
Cond. Amps	4.1	
Cond. Power Factor	0.95	
Cond. Power (W)	2012	

Indoor Measurements

Return Temp (F)	75.0	
Return %RH (%)	50.0	
Return Wet Bulb (F)	62.6	
Supply Temp (F)	55.0	
Supply %RH (%)	81.0	
Supply Wet Bulb (F)	51.8	
Est. Airflow (SCFM)	1149	
TESP (inH2O)	0.50	
AHU Volts	110.0	
AHU Amps	3.0	
AHU Power Factor	0.95	
AHU Power (W)	980	

System Info & Weather

System Type	Split	
Nominal Tonnage (Tons)	3	
Refrigerant	R410A	
Rated Airflow	400	
SEER	13-16	
Metering Device	TXV	
Atmos. Pressure (psia)	14.696	
Elevation (ft)	5012	
Benchmarked	Yes	
System Stability	Stable	

Performance Calculations

Nominal Capacity (Tons/Btuh)	3.0 / 36,000
Normalized Capacity (Tons/Btuh)	2.7 / 32,676
Actual Capacity (Tons/Btuh)	2.9 / 34,827 (107% Normalized)
Sensible Capacity (Tons/Btuh)	2.1 / 25,002 (103% Normalized)
Latent Capacity (Tons/Btuh)	0.8 / 9,825 (117% Normalized)
Sensible Heat Ratio	0.7
Temp Split Target (F)	18.7
Temp Split (F)	20.0
Dehumidification (lb/hr)	9.1
Fan Efficacy (W/SCFM)	0.9
Total Power (W)	2992
EER	11.6
Approx. SEER	12.9





Corrective Measures

System Information

Coords: 40.42773, -105.07575
 Condenser
 Goodman VSX130181
 S/N 1909035516
 Air Handler
 Goodman FT130181
 S/N 190903870

System Profile

System Type	Split
Nominal Tonnage	3
Refrigerant	R410A
Nominal Airflow	400
SEER	13-16
Metering Device	TXV
System Benchmarked	Yes 
System Stability	Stable

Test In Score

85% B

Test Out Score

94% A

Corrective Actions

Thermostat
 Plugged wire penetration

Electrical System
 Repaired bad wiring/connections
 Repaired/tightened connections
 Checked ground connections

Air Distribution System
 Cleaned blower
 Cleaned evaporator

Air Filtration System
 Replaced filter

Condensate Drain System
 No action required
 Other

Refrigerant Charge
 No action required

Cleaned condenser (water rinse)

Indoor Equipment
 Cleaned evaporator

Cooling Capacity
 Operation satisfactory

Cooling Efficiency
 Operation satisfactory

Note: these are simple checkboxes that the technician enters during the assessment or repairs

Sample Report



A/C System Vitals Report

measureQuick A/C System Vitals Score™ combines the cooling performance, age degradation, initial SEER and capacity, refrigerant charge, and static pressure of the duct system into a single grade.

Your system is comprised mechanical equipment and several subsystems including the control, electrical, air distribution, air filtration, and condensate disposal systems. Servicing and or replacing the mechanical equipment without addressing the subsystems only assures premature equipment failure.

Modern A/C systems are designed to last between 10 and 15 years but only when properly installed*. System life is dramatically shortened due to poor installation or long deferred maintenance.

- Systems scoring 80 or more are typically considered excellent candidates for repair.
- Systems scoring under 50 may require significant repairs. These systems may be better candidates for replacement.

Refrigerant Charge (Superheat and Subcooling)

A/C equipment works by using expensive refrigerant to remove heat from inside a room. Superheat and Subcooling are used to determine the precise amount of refrigerant to sufficiently “charge” the equipment. Moreover, these same calculations may further indicate refrigerant leakage and contamination.

Contaminated refrigerant causes unwanted chemical reactions like forming acids, which literally eat your system alive. Likewise, the incorrect refrigerant charge increases energy consumption while reducing equipment life, cooling capacity, and humidity removal.

Heat Transfer (Approach and Temperature Split)

Fundamentally, air conditioners transfer heat from places where it’s not wanted (inside your home) to other places (outside your home). This is accomplished by blowing inside air across cold coils (the evaporator). The evaporator is filled with refrigerant. The refrigerant is raised in temperature pumped to the condenser unit (the unit outside) to cool thereby transferring the heat outside.

The efficiency of condenser heat transfer is determined by subtracting the temperature of the refrigerant coming out of the condenser (the cooled refrigerant) from the outdoor temperature; this is called the “approach”. A high approach means the refrigerant is not cooling efficiently.

The performance of the evaporator is determined by comparing the temperature of cool air blowing out of your vents and the temperature of the air returning to the system; this is called the temperature split.

Temperature splits that are too high indicate low airflow and can cause the evaporator coil to freeze up. A low temperature split may indicate a refrigerant undercharge, possible leak, or return air duct leakage. Either way, the system will run excessively reducing the equipment life and increasing energy consumption.

Air Distribution and Filtration (TESP and Filter Face Velocity)

Total External Static Pressure (TESP) is a measure of the resistance to airflow in an air conditioning system by components external to the rated appliance.

Typically, the evaporator, air filter, filter grill, registers, supply and return ducts all reduce the airflow. We can measure the resistance by measuring static pressure i.e., pressure in the ducts.

A high TESP means low airflow. Low airflow means longer system run times causing higher energy costs, premature failures, expensive repairs.

Filter face velocity is the speed of the air flowing across the filter. It’s measured to assure proper air filter sizing. An undersized air filter permits dirt to flow to the evaporator coil. Evaporator coils, wet from condensation, will attract dirt sticking too and eventually clogging the evaporator coil reducing the cooling efficiency.



Thermostat



Electrical System



Electrical System



Electrical System



Air Distribution System




Air Distribution System



Air Distribution System



Air Distribution System

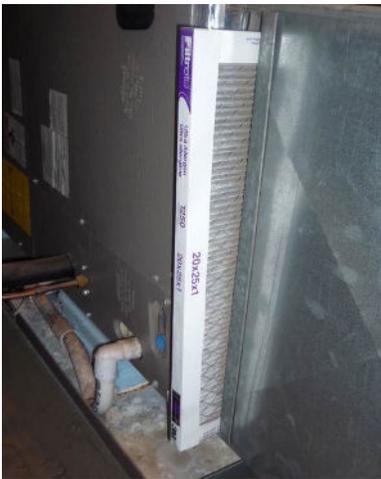

Air Filtration System



Air Filtration System



Condensate Drain System



Condensate Drain System

Sample Report



Outdoor Equipment




Outdoor Equipment



Outdoor Equipment



Indoor Equipment

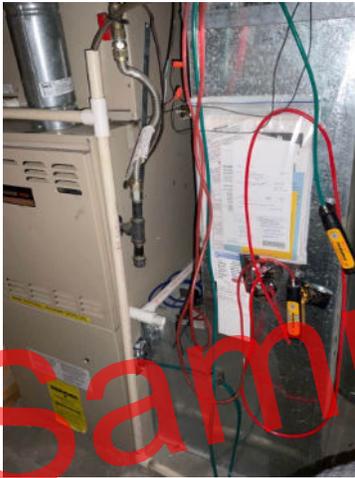

Indoor Equipment



Cooling Capacity

Sample Report



General

Sample Report